

MEGMEET Electrical Co., Ltd
MEGMEET Welding Technology Co., Ltd

Add: 4-5th Floor, Block 2, New Materials Industrial Park, No28,
Langshan Road, Nanshan District, Shenzhen, Guangdong
Province, China

www.megmeet.com (MEGMEET Electrical)

www.megmeet-welding.com (MEGMEET Welding Technology)

E-mail: welding@megmeet.com

Tel: +86-755-8660 0555

MEGMEET Germany GmbH

Add: Stadtheider Str. 26-28,
33609 Bielefeld, Germany

Tel: +49 521 588 131 40

Email: welding@megmeet.com

MEGMEET Electrical India Pvt Ltd

Add: Plot No. 140, Sector 7, IMT
Manesar, Gurugram - 122052,
Haryana

Tel: +91 12442 14460

Email: welding@megmeet.com

MEGMEET (Thailand) Co., Ltd

Add: 7/375 Moo 6, Tambon M
abyangporn, Pluak Daeng,
Rayong 21140

Tel: +66 (0) 33 012 666

Email: welding@megmeet.com

Follow us:



MEGMEET's strong technical strength, extensive industry application experience, relentless attention to customer needs, and the spirit of continuous innovation enable us to bring tailor-made products and solutions to help customers achieve greater success.

*MEGMEET Welding Technology Co., Ltd is continuously striving to develop and innovate for new product. We reserves the right of changing the technical specifications and designs without notices in advance.
Copyright 2023 © MEGMEET Welding Technology Co., Ltd



MetaTIG DC

Full-digital IGBT Inverter Multifunctional DC TIG



MetaTIG 315/400/500 DC

(Full-digital IGBT Inverter
Multifunctional DC TIG)



Product Features

- Wide applications: supporting carbon steel, stainless steel, alloy steel and other metal materials;
- Comprehensive functions with pulse DC TIG, high-speed TIG spot welding, MMA and others;
- Full digital intelligent control is adopted. Internal background menu is open and adjustable to better satisfy more technological requirements of various working conditions;
- VRD anti-shock function with adjustable arc force and better arc stiffness in MMA mode;
- IOT interface is reserved to quickly access to Megmeet SMARC management platform or the third-party welding data system to realize efficient welding interconnection;
- Communication interface is reserved to support multiple types of communication protocols to connect with different brands of robots and automation devices;
- Software is upgradable through U-disk interface to help customers easily obtain Megmeet foremost welding process or customized functions;
- Optional foot switch, water-cooler, water-cooled torch, trolley, etc.

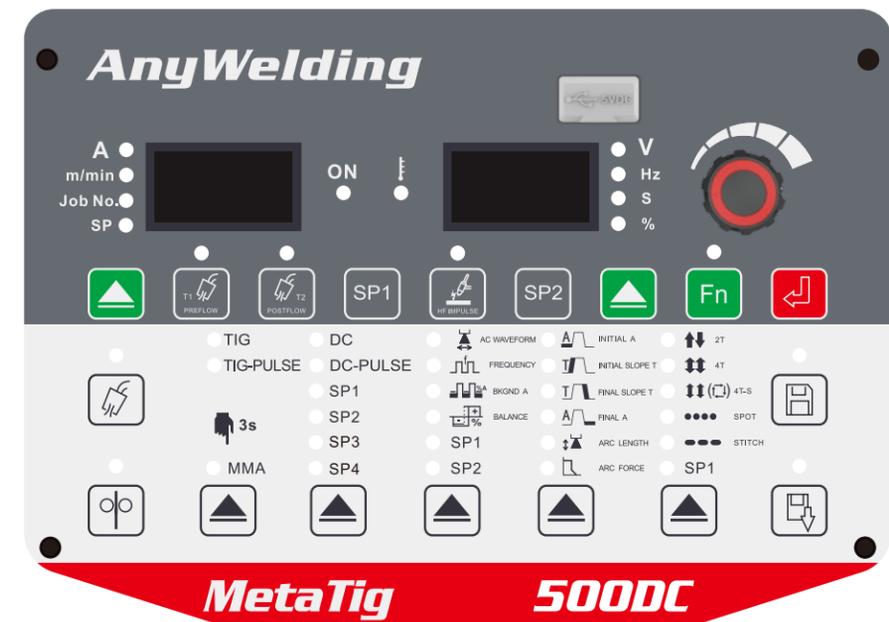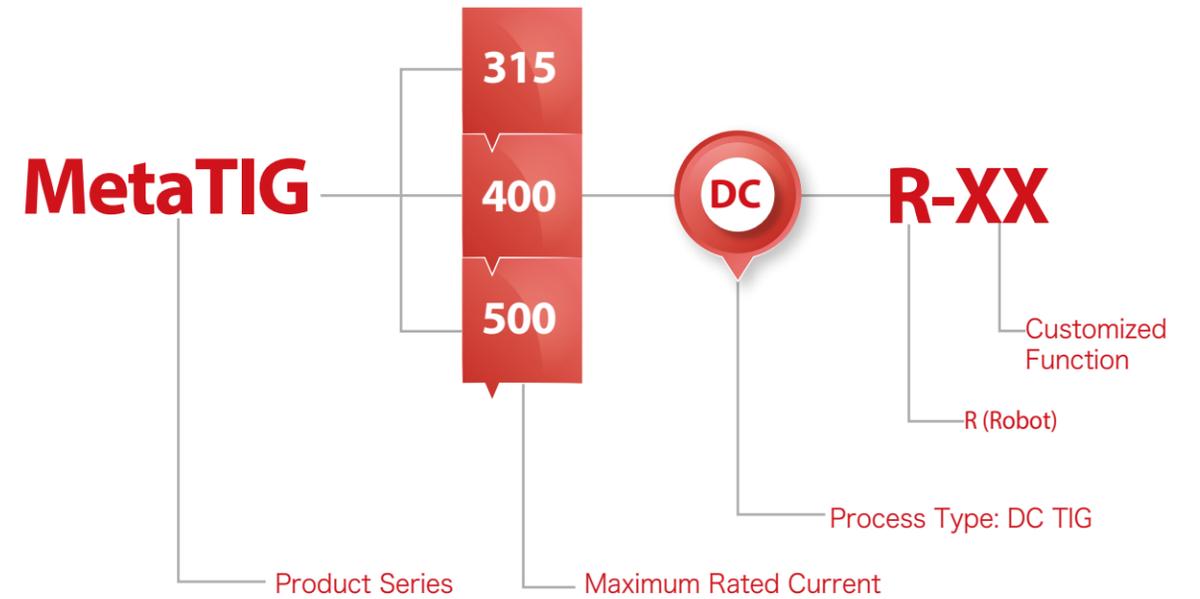

- | | | | |
|---|---|--|--|
| <input checked="" type="checkbox"/> Carbon Steel | <input checked="" type="checkbox"/> DC | <input checked="" type="checkbox"/> Spot Welding | <input checked="" type="checkbox"/> U-disk |
| <input checked="" type="checkbox"/> Stainless Steel | <input checked="" type="checkbox"/> Pulse | <input checked="" type="checkbox"/> MMA | <input type="checkbox"/> SMARC IOT |


Extensive Welding Process

Diversified welding applications from ultra-thin to medium-thick plates with high-performance welding quality.

Welding Process Type	Welding Process Name	Advantage	Material	Industry
DC TIG	DC TIG	Stable arc, high adaptability for gap, easier for one-sided welding and double-sided forming	Carbon steel, stainless steel, titanium alloy, etc	Petrochemical, pressure pipeline&vessel backing weld, etc.
DC PULSE TIG	DC-Pulse TIG	Low heat input, beautiful fish-scale shape is available, pulse frequency up to 3000Hz	Carbon steel, stainless steel, titanium alloy, etc	Sheet metal and welding occasions with requirements for heat input and weld form, etc.
MMA	MMA	Easy arc start, non-stick with rod, softer arc&less spatter, and beautiful weld shape	Carbon steel, alloy steel, stainless steel, etc.	Boiler, pressure vessel, petrochemical industry, pressure pipeline, outdoor construction, etc.


Multiple waveform controls provide optimal combination according to welding needs

- With triangle wave, square wave, sine wave, trapezoidal wave and others;
- Optimal setting for waveform in different welding phases.

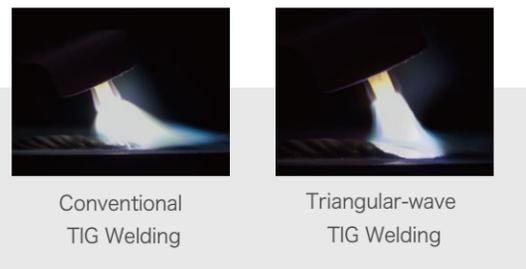


Square Wave

Precise control in current waveform and accurate adjustment in parameters of peak current, base current, frequency and others, with high arc stability and good dynamic characteristics, applicable for various stainless steel welding.

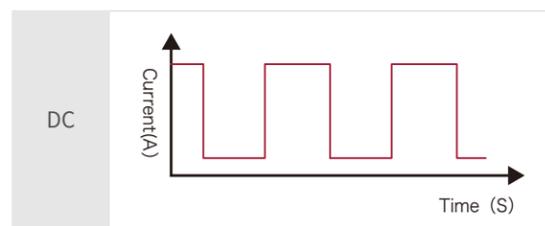


Trapezoidal Wave

Soft arc brings good wetting effect to fusion pool, suited to groove welding and overhead welding.

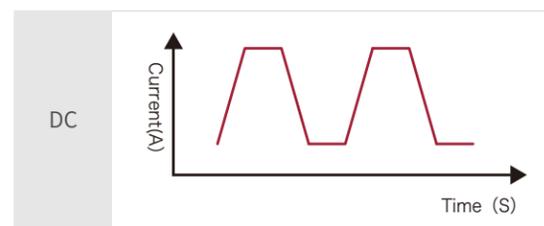


Triangle Wave

Short peak-time and low heat-input, suitable for thin sheet welding.

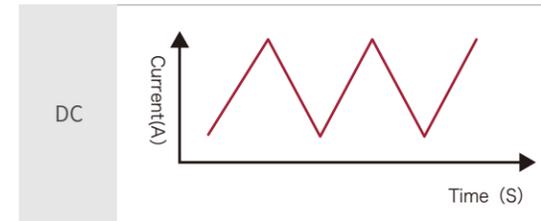


Sine Wave

Arc noise is smaller and softer.

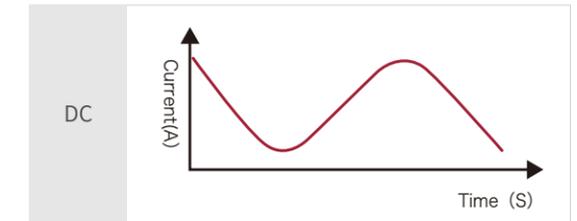

Arc is able to start and stabilize at 3A in DC welding


- Unique circuit design supports arc to start at 3A and stabilize at 3A in DC welding, ensuring continuous arc in very small current.

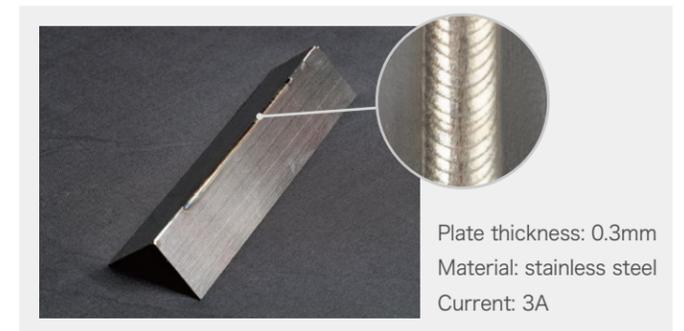

0.1Hz-3000Hz High Frequency Output

Suited to high-quality welding from extreme thin to medium-thick plates

- In low-frequency pulse (0.1-10Hz), arc column is wide, adaptive for all-position welding;
- In medium-high frequency pulse (10-3000Hz), arc directivity is strong and heat input is low, supporting high-speed welding and fillet welding in thin plates.

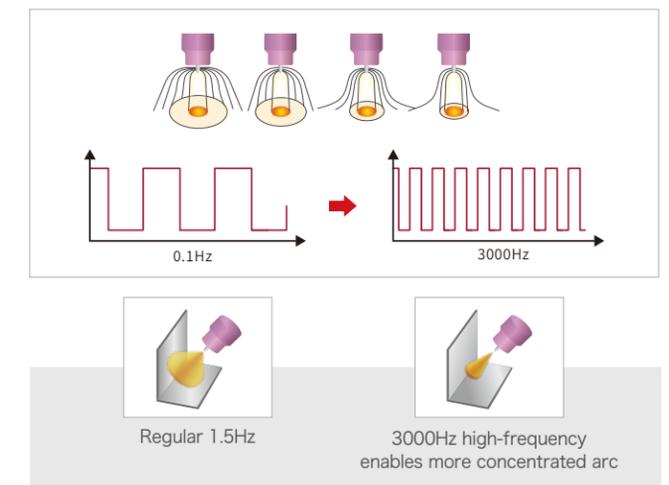

Be capable to weld diverse metal materials



Carbon Steel

Output current ripple is small and arc is stable. Fusion pool is well controllable.




Stainless Steel

High-frequency pulse effectively compresses welding arc and reduce heat-input, bringing easier weldability and better welding shape to stainless steel thin plate.

High-stability TIG Spot Welding Function

- Fine regulation is suitable for high-quality welding of ultra-thin plates;
- Setting range of spot welding time is 0.1-30 seconds (tuning unit is 0.1 seconds). Arc is stable and welding spot is consistent.

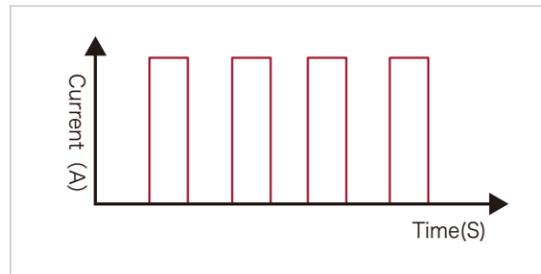

Welding current: 90A
Plate thickness: 3mm
Weld form: fillet weld
Base material: stainless steel
Spot welding time: variable
(manual operation)



Spot welding function is not used

Welding current: 90A
Plate thickness: 3mm
Weld form: fillet weld
Base material: stainless steel
Spot welding time: 1s



Spot welding function is used

U-Disk Interface

- To ensure customers quickly obtaining Megmeet foremost welding software and customized functions;
- Welding process and software could be sent to user by email and upgraded into machines through U-disk interface.



Circulating Water Cooler (Optional)

Circulating Water Cooler AnyCool-66	
Water cooler power supply	Powered by welding machine
Rated power	370W
Rated voltage	380V AC
Cooling water capacity	6.8L
Cooling water flow	3.5L/min
Cooling water maximum lift	20m
Flow alarm	✓



Foot Switch

- Easy operation in current adjustment;
- Current is able to be set with the maximum range: 5-500A;
- 5-pin control cable and 2 meters of length (can be extended as demand) to meet long-distance welding;
- Control modes are optional. Current can be adjusted by foot switch or by welding machine as needed.



Technical Specification

Model	MetaTIG 500DC	MetaTIG 400DC	MetaTIG 315DC
Control method	Full-digital IGBT Control	Full-digital IGBT Control	Full-digital IGBT Control
Input voltage	3 Phase AC 380 V(±25%)	3 Phase AC 380 V(±25%)	3 Phase AC 380 V(±25%)
Input frequency	40~70Hz	40~70Hz	40~70Hz
Inverter switching frequency	110KHz	110KHz	110KHz
Rated input capacity	24.4KVA/22KW	17.5KVA/16KW	12.5KVA/11.4KW
Rated output no-load voltage	66V	66V	66V
Rated output current	500A	400A	315A
Rated output voltage	30V	26V	22.6V
Duty cycle	40%@500A 100%@400A	100%@400A	100%@315A
Set current range	DC TIG 5-500A MMA 30-500A	DC TIG 5-400A MMA 30-400A	DC TIG 5-315A MMA 30-315A
Power Factor	0.94	0.94	0.94
Efficiency	90%@500A	91%@400A	91%@315A
DC pulse frequency	0.1-3000Hz	0.1-3000Hz	0.1-3000Hz
Pulse Width	1-99%	1-99%	1-99%
Arc striking method	High-frequency arc/Lifting arc		
Parameter JOB	50 Groups	50 Groups	50 Groups
Rise Time	0-20s Continuous regulation (0.1s increments)		
Fall time	0-20s Continuous regulation (0.1s increments)		
Pre-gas time	0-25s Continuous regulation (0.1s increments)		
Post-gas time	0-25s Continuous regulation (0.1s increments)		
Output terminal	Quick plug	Quick plug	Quick plug
Foot Switch (optional)	✓	✓	✓
Protection rating	IP23	IP23	IP23
Insulation class	H	H	H
Cooling method	Forced-air	Forced-air	Forced-air
Dimensions (length x width x height)	647x291x572mm	647x291x572mm	647x291x572mm
Weight	37kg	37kg	37kg
Extension function			
IOT SMARC System (optional)	✓	✓	✓
USB Upgrade	✓	✓	✓
Robot (optional)	✓	✓	✓
LCD front panel (optional)	✓	✓	✓